




Standard Namur Solenoid Valve

3/2 and 5/2 way Namur Solenoid Valves includes standard coil and Din connector for use with double acting and single acting Pneumatic Actuators. Body Aluminium, spool Stainless Steel and seals NBR.

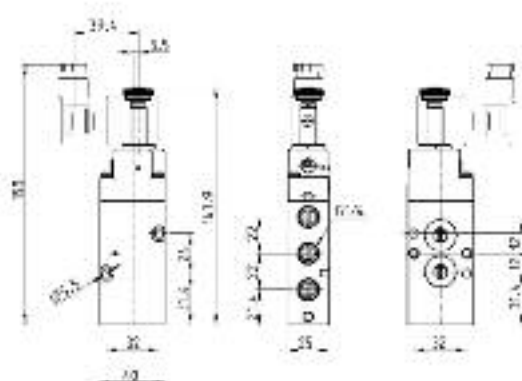


Part Number
NA34 15 02 + voltage (3-2) Sol Spring
NA54 15 02 + voltage (5-2) Sol Spring

Also available SOL/SOL

Special Namur Solenoid Valve

Explosion Proof 3/2 and 5/2 Namur direct mount solenoid valve. For use with double acting and single acting Pneumatic actuators.

Body Aluminium. IP65 protection. M20 x 1.5 conduit entry.
Explosion proof to EExd IIC T4/T6 (AC = T4/DC = T6) ATEX II 2GD.

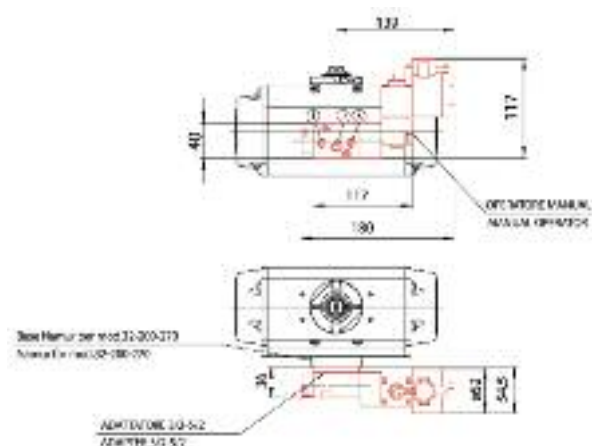

Part Number	
03700000153	EV 3-5/2 Namur 24 V DC
03700000154	EV 3-5/2 Namur 24 V AC (50/60 Hz)
03700000155	EV 3-5/2 Namur 110 V AC (50/60 Hz)
03700000151	EV 3-5/2 Namur 240 V AC (50/60 Hz)